


# LED DOWNLIGHT

Product&amp;Family Code: 016 041 0003

**LUNA**


WHITE


## Technical Drawing

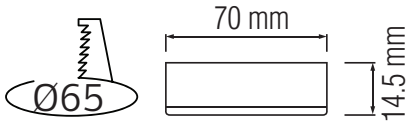

## Technical Data

Voltage (V)	220-240V
Product Wattage (W)	3
Equivalence with incandescent lamp	24
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	4200K
Materials	Aluminium + Plastic
Protection Class	II
Dimmable	No
EEI	A to A++
Warm-up time up to 60 %of the full light output	Instant Full Light
Luminous Flux (lm)	210
Luminous Efficacy (lm/W)	70
Rated Life (hrs) ⌚	30.000
IP Rating	20
Power Factor	>0.5
Beam Angle	120°
Starting Time	<0.2s
Number of ON-OFF cycling	x20.000

## Photometric Diagram

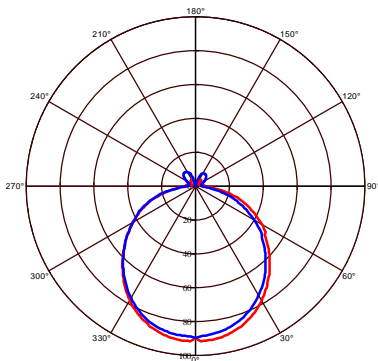

C0 Plane beam angle(50%) 115.6(DEG) C90 Plane beam angle(50%) 113.7(DEG)

## Applications

- Airport, Bathroom, Bedroom, Car Park, Cinema, Gallery, Hospital, Hotel, Kitchen, Museum etc.



## Features

- Recessed+Surface Mounting Available
- High Lumen and CRI, Good quality & Constant Current driver.
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.

