


LED PROJECTOR

Product Code:


068 015 0045

PROPORT-45

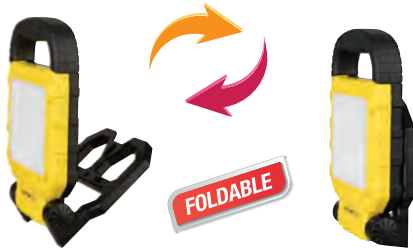


■ With 1.8 meter cable

Technical Drawing



Photometric Diagram



b C0 Plane beam angle(50%) b C90 Plane beam angle(50%)

C0 Plane beam angle(50%):111.8(DEG) C90 Plane beam angle(50%):107.9(DEG)

Technical Data

Voltage (V)	220-240V
Product Wattage (W)	45
Equivalence with incandescent lamp(W)	360
Colour Render Index (Ra)	>Ra80
Colour Temperature (K)	6400K
Materials	PC + Aluminium
Protection Class	I
Dimmable	No
EEI	A to A++
Warm-up time up to 60 % of the full light output	Instant Full Light
Luminous Flux (lm)	3500
Luminous Efficacy (lm/W)	78
Rated Life (hrs) ⌚	30.000
IP Rating	54
Power Factor	>0.9
Beam Angle	100°
Starting Time	<0.2s
Number of ON-OFF cycling	x15.000

Applications

- Indoor and outdoor work areas.



Features

- High Lumen and CRI, Good quality
- High heat dissipation, low carbon and environmental protection.
- SMD LED Lamp Base.
- Very low energy consumption.

